

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 0 941 703 A1**

(12)

**EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
15.09.1999 Bulletin 1999/37

(51) Int Cl.<sup>6</sup>: **A61B 17/12**

(21) Application number: **99301776.3**

(22) Date of filing: **09.03.1999**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE**  
Designated Extension States:  
**AL LT LV MK RO SI**

(72) Inventor: **Hleshlma, Grant**  
**Huntington Beach, California 92649 (US)**

(74) Representative: **Mercer, Christopher Paul**  
**Carpmaels & Ransford**  
**43, Bloomsbury Square**  
**London WC1A 2RA (GB)**

(30) Priority: **10.03.1998 US 77468 P**


(71) Applicant: **Cordis Corporation**  
**Miami Lakes Florida 33014 (US)**

(54) **Hydraulically detachable embolic coil assembly**

(57) A medical device for placing an embolic coil at a preselected location within a vessel comprising a po-

sitioning catheter having a distal tip for retaining the embolic coil which when pressurized with a fluid expands outwardly to release the coil at the preselected position.

**FIG. 3**

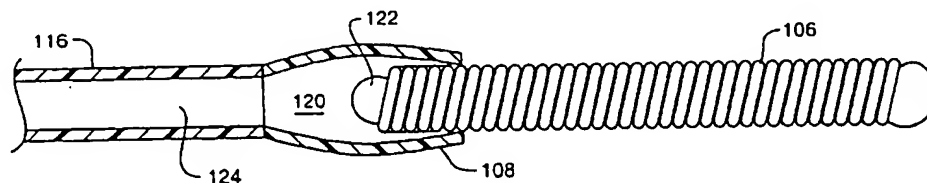

**EP 0 941 703 A1**

## Description

### BACKGROUND OF THE INVENTION

#### Field of the Invention

[0001] The present invention relates to a medical device for placing an embolic coil at a preselected location within a vessel of the human body, and more particularly, relates to a catheter having a distal tip for retaining the embolic coil in order to transport the coil to a preselected position within the vessel and a control mechanism for releasing the embolic coil at the preselected position.

#### Description of the Prior Art

[0002] For many years flexible catheters have been used to place various devices within the vessels of the human body. Such devices include dilatation balloons, radiopaque fluids, liquid medications and various types of occlusion devices such as balloons and embolic coils. Examples of such catheter devices are disclosed in U.S. Patent No. 5,108,407, entitled "Method And Apparatus For Placement Of An Embolic Coil"; U.S. Patent No. 5,122,136, entitled, "Endovascular Electrolytically Detachable Guidewire Tip For The Electroformation Of Thrombus In Arteries, Veins, Aneurysms, Vascular Malformations And Arteriovenous Fistulas." These patents disclose devices for delivering embolic coils to preselected position within vessel of the human body in order to treat aneurysms or alternatively to occlude the blood vessel at the particular location.

[0003] Coils which are placed in vessels may take the form of helically wound coils, or alternatively, may be random wound coils, coils wound within other coils or many other such coil configurations. Examples of various coil configurations are disclosed in U.S. Patent No. 5,334,210, entitled, "Vascular Occlusion Assembly"; U.S. Patent No. 5,382,259, entitled, "Vasoocclusion Coil With Attached Tubular Woven Or Braided Fibrous Coverings." Embolic coils are generally formed of a radiopaque metallic materials, such as platinum, gold, tungsten or alloys of these metals. Often times several coils are placed at a given location in order to occlude the flow of blood through the vessel by promoting thrombus formation at the particular location.

[0004] In the past, embolic coils have been placed within the distal end of the catheter and when the distal end of the catheter is properly positioned the coil may then be pushed out of the end of the catheter with, for example a guidewire, to release the coil at the desired location. This procedure of placement of the embolic coil is conducted under fluoroscopic visualization such that the movement of the coil through the vasculature of the body may be monitored and the coil may be placed in the desired location. With these placements systems there is very little control over the exact placement of the coil since the coil may be ejected to a position some

distance beyond the end of the catheter. As is apparent, with these latter systems, when the coil has been released from the catheter it is difficult, if not impossible, to retrieve the coil or to reposition the coil.

5 [0005] Numerous procedures have been developed to enable more accurate positioning of coils within a vessel. Still another such procedure involves the use of a glue or solder for attaching the embolic coil to a guidewire which, in turn, is placed within a flexible catheter for positioning the coil within the vessel at a preselected position. Once the coil is at the desired position, the coil is restrained by the catheter and the guidewire is pulled from the proximal end of the catheter to thereby cause the coil to be detached from the guidewire and released from the catheter system. Such a coil positioning system is disclosed in U.S. Patent 5,263,964, entitled, "Coaxial Traction Detachment Apparatus And Method."

10 [0006] Another coil positioning system utilizes a catheter having a socket at the distal end of the catheter for retaining a ball which is bonded to the proximal end of the coil. The ball, which is larger in diameter than the outside diameter of the coil, is placed in a socket within the lumen at the distal end of the catheter and the catheter is then moved into a vessel in order to place the coil at a desired position. Once the position is reached, a pusher wire with a piston at the end thereof is pushed distally from the proximal end of the catheter to thereby push the ball out of the socket in order to thereby release the coil at the desired position. Such a system is disclosed in U.S. Patent No. 5,350,397, entitled, "Axially Detachable Embolic Coil Assembly." One problem with this type of coil placement system which utilizes a pusher wire which extends through the entire length of the catheter and which is sufficiently stiff to push an attachment ball out of engagement with the socket at the distal end of the catheter is that the pusher wire inherently causes the catheter to be too stiff with the result that it is very difficult to guide the catheter through the vasculature of the body.

15 [0007] Another method for placing an embolic coil is that of utilizing a heat releasable adhesive bond for retaining the coil at the distal end of the catheter. One such system uses laser energy which is transmitted through a fiber optic cable in order to apply heat to the adhesive bond in order to release the coil from the end of the catheter. Such a method is disclosed in U.S. Patent No. 5,108,407, entitled, "Method And Apparatus For Placement Of An Embolic Coil." Such a system also suffers from the problem of having a separate element which extends throughout the length of the catheter with the resulting stiffness of the catheter.

### SUMMARY OF THE INVENTION

20 [0008] The present invention is directed toward a vascular occlusive coil deployment system for use in placing an embolic coil at a preselected site within a vessel

which includes an elongated, flexible catheter having a distal tip for retaining the coil so that the coil may be moved to the preselected position within the vessel. The catheter has a lumen which extends therethrough the length of the catheter and also includes a distal end which is formed of a material having a durometer such that when a fluid pressure of about 300 pounds per square inch (psi) is applied to the interior of the catheter, the walls of the distal tip expand outwardly, or radially, to thereby increase the lumen of the distal tip of the catheter. The proximal end of the embolic coil is placed into the lumen of the distal tip of the catheter and is retained by the distal tip of the catheter. A hydraulic injector, such as a syringe, is coupled to the proximal end of the catheter for applying a fluid pressure to the interior of the catheter. When the coil is placed at a desired position within a vessel, fluid pressure is then applied to the interior of the catheter by the hydraulic injector to thereby cause the walls of the distal tip to expand outwardly to thereby release the coil for placement in the vessel.

[0009] In accordance with another aspect of the present invention, the flexible catheter is comprised of a proximal section and a relatively short distal section. The proximal section is formed of a material which is sufficiently flexible to be passed through the vasculature of the human body and is of a durometer which essentially resists outward expansion when a fluid pressure on the order of about 300 psi is applied to the interior of the catheter. The distal section of the catheter is formed of a material which is also sufficiently flexible to be passed through the vasculature of the body, yet is of a durometer which is significantly lower than the durometer of the proximal section and exhibits the property of expanding outwardly, or radially, when such a fluid pressure is applied to the interior of the catheter to thereby permit the release of the embolic coil.

[0010] In accordance with still another aspect of the present invention, the distal section of the catheter has a durometer in a range of between about 25D and 55D.

[0011] In still another aspect of the present invention, the embolic coil is comprised of a helical coil having a proximal end, a distal end, and a lumen extending therethrough. A seal plug is disposed within the lumen of the proximal end of the coil in fluid-tight engagement. The proximal end of the coil is disposed in a fluid-tight engagement within the lumen of the distal section of the catheter and is retained by the lumen of the catheter for subsequent release.

[0012] In another aspect of the present invention, the hydraulic injector for applying a fluid pressure to the interior of the catheter takes the form of a syringe which is coupled to the proximal end of the catheter for, upon movement of the piston, creating a fluid pressure which is applied to the interior of the catheter to thereby cause the release of the embolic coil.

[0013] In accordance with another aspect of the present invention, the embolic coil may take the form of other types of implantable devices, such as a vascular

filter.

[0014] In another aspect of the present invention, there is provided a method for placing an embolic coil with a selected site within a vessel of the body comprising the steps of advancing a catheter through the vasculature of the body to place an embolic coil which is retained within the lumen of the distal tip of the catheter to a preselected site, applying a fluid pressure to the interior of the catheter to thereby cause the distal tip of the catheter to expand radially outwardly to release the embolic coil at the preselected site, and withdrawing the catheter from the vasculature system.

[0015] These aspects of the invention and the advantages thereof will be more clearly understood from the following description and drawings of a preferred embodiment of the present invention:

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0016]

Figure 1 is an enlarged, partial sectional view of the hydraulic vascular occlusive coil deployment system of the present invention;

Figure 2 is an enlarged partially sectional view showing the distal end of the coil deployment system prior to deployment of the coil;

Figure 3 and 4 illustrate the sequential steps in the radial expansion of the distal tip of the coil deployment system as the embolic coil is released; and Figure 5 illustrates the distal tip of the coil deployment system after release of the embolic coil.

#### DESCRIPTION OF A PREFERRED EMBODIMENT

[0017] Figure 1 generally illustrates the vascular occlusive coil deployment system 100 which is comprised of a hydraulic injector or syringe 102, coupled to the proximal end of a catheter 104. An embolic coil 106 is disposed within the lumen of the distal end 108 of the catheter. The proximal end of the coil 106 is tightly held within the lumen of the distal section 108 of the catheter 104 until the deployment system is activated for release of the coil. As may be seen, the syringe 102 includes a threaded piston 110 which is controlled by a handle 112 for infusing fluid into the interior of the catheter 104. Also as illustrated, the catheter 104 includes a winged hub 114 which aides in the insertion of the catheter into the vascular system of the body.

[0018] Figure 2 illustrates in more detail the distal end of the catheter 104. The catheter 104 includes a proximal section 116 and the distal section 108. The proximal section 118 of the embolic coil 106 is disposed within the distal section 108 of the catheter and is tightly held within the lumen 120 of this distal section 108 prior to release of the coil. As may be appreciated, Figure 2 illustrates the vascular occlusive coil deployment system prior to activation of the piston of the syringe and prior

to release of the coil.

[0019] The embolic coil 106 may take various forms and configurations and may even take the form of a randomly wound coil, however, with the helical wound coil as illustrated in Figure 2, the coil is provided with a weld bead or seal plug 122 which is disposed in a lumen 123 which lumen extends throughout the length of the coil 106. The seal plug 122 serves to prevent the flow of fluid through the lumen of the coil 106 so that when the coil 106 is placed in fluid-tight engagement with the lumen 120 the coil serves to provide a fluid-tight seal at the distal end of the catheter 104. Adjacent turns of the coil 106 at the proximal end 118 of the coil are preferably continuously welded together so that the welded turns of the coil in conjunction with the plug seal 122 provide a generally unitary structure which serves to plug or seal the distal end of the catheter in a fluid tight relationship.

[0020] Preferably, the proximal section 116 and the distal section 108 of the catheter 104 are formed of materials having different durometers. The proximal section 116 is preferably formed of Pebax material having a durometer in a range of about 62D to 75D. The proximal section is sufficiently flexible to transverse the vasculature of the human body, but is sufficiently rigid such that when a fluid pressure of approximately 300 psi is applied to the interior of this section of the catheter there is very little, if any, radial expansion of the walls of this section. On the other hand, the distal section 108 of the catheter is preferably formed of polymer material with a relatively low durometer which, exhibits the characteristic that when a fluid pressure of approximately 300 psi is applied to the interior of the catheter the walls of the distal section 108 expand radially, somewhat similar to the action of a balloon inflating, to thereby release the proximal end 118 of the coil 106. As may be appreciated, there are numerous materials which could be used to fabricate the proximal section 116 and distal section 108 of the catheter 104, however, the distal section 108 is preferably formed from a block copolymer such as Pebax having a durometer of between 25D and 55D with a durometer of 40D being the preferred durometer.

[0021] Figures 3 and 4 generally illustrate the coil release mechanism in action for the vascular occlusive catheter deployment system. More particularly, as shown in Figure 3, when a hydraulic pressure is applied to the interior 124 of the catheter 104 the relatively low durometer distal section 108 of the catheter begins to expand radially, much as a balloon expands during the process of inflation. As the distal section 108 continues to expand radially there comes a point as illustrated in Figure 4 in which the coil 106 becomes disengaged from the lumen of the distal section 108 and the coil is then released from the catheter and is deployed at that location within the vessel.

[0022] As illustrated in Figure 5, when the coil 106 has been released from the catheter 104 the catheter may then be withdrawn leaving the coil positioned at the desired site.

[0023] With the vascular occlusive coil deployment system of the present invention it is possible to place an embolic coil very precisely at a desired location within a vessel. Once the coil has been placed in that location by use of the catheter, the catheter may be activated by applying a hydraulic pressure to the interior of the catheter to thereby cause the catheter to release the coil and deposit the coil very accurately at the desired location.

[0024] As is apparent, there are numerous modifications of the preferred embodiment described above which will be readily apparent to one skilled in the art, such as many variations and modifications of the coil including numerous coil winding configurations, or alternatively other types of implant devices, such as a vascular filter. Also, there are obviously variations of the syringe arrangement for applying a fluid pressure to the interior of the catheter, including many other fluid pressure generating systems for increasing the pressure within the interior of a catheter in order to cause the distal section of the catheter to expand. These modifications would be apparent to those having ordinary skill in the art to which this invention relates and are intended to be within the scope of the claims which follow.

## Claims

1. A vasoocclusive coil deployment system for use in placing a coil at a preselected site within a vessel comprising:
  - an elongated flexible catheter having a lumen extending therethrough and having a proximal section and a distal section, said distal section of the catheter being formed of a material having a durometer which exhibits the characteristic that when a fluid pressure is applied to the interior of the catheter the walls of the distal section of the catheter expand outwardly;
  - an embolic coil being disposed in fluid-tight engagement within the lumen of the distal section of the catheter; and,
  - a syringe coupled to the proximal section of the catheter for applying a fluid pressure to the interior of the catheter to thereby cause the distal section of the catheter to expand outwardly to thereby release the embolic coil.
2. A vasoocclusive coil deployment system as defined in Claim 1, wherein said proximal section of said catheter is formed of a material which is sufficiently flexible to be passed through the vasculature of the body and is formed of a material which exhibits the characteristic of having substantially no radial expansion when a fluid pressure of about 300 psi is applied to the interior of the catheter, the distal tip is formed of a material which is also sufficiently flexible to be passed through the vasculature of the

body and is of a durometer which is substantially lower than the durometer of the proximal section.

3. A vasoocclusive coil deployment system as defined in Claim 2, wherein the distal tip of the catheter is formed of a polymer having a durometer in a range of between about 25D and 55D.
4. A vasoocclusive coil deployment system as defined in Claim 3, wherein the vasoocclusive coil is comprised of a helical coil having a proximal end, a distal end and a lumen extending therethrough, a seal plug is disposed in fluid-tight engagement within the lumen at the proximal end of the coil and the proximal end of the coil is disposed within the lumen of the distal section of the catheter.
5. A vasoocclusive coil deployment system for use in placing a coil at a preselected site within a vessel comprising:
  - an elongated flexible catheter having a lumen extending therethrough and having a proximal section and a distal section, said distal section of the catheter being formed of a material having a durometer which exhibits the characteristic that when a fluid pressure of about 300 psi applied to the interior of the catheter the walls of the distal section of the catheter expand outwardly;
  - an embolic coil being disposed in fluid-tight engagement within the lumen of the distal section of the catheter; and,
  - a piston coupled to the proximal section of the catheter for applying a fluid pressure to the interior of the catheter to thereby cause the distal section of the catheter to expand outwardly to thereby release the embolic coil.
6. A vasoocclusive coil deployment system as defined in Claim 5, wherein said proximal section of said catheter is formed of a material which is sufficiently flexible to be passed through the vasculature of the body and is formed of a material which exhibits the characteristic of having substantially no radial expansion when a fluid pressure of about 300 psi is applied to the interior of the catheter, the distal tip is formed of a material which is also sufficiently flexible to be passed through the vasculature of the body and is of a durometer which is substantially lower than the durometer of the proximal section.
7. A vasoocclusive coil deployment system as defined in Claim 8, wherein the distal tip of the catheter is formed of a polymer having a durometer in a range of between about 25D and 55D.
8. A vasoocclusive coil deployment system as defined

in Claim 2 or Claim 6, wherein the distal tip of the catheter has a durometer of about 40D.

9. A vasoocclusive coil deployment system as defined in Claim 7, wherein the vasoocclusive coil is comprised of a helical coil having a proximal end, a distal end and a lumen extending therethrough, a seal plug is disposed in fluid-tight engagement within the lumen at the proximal end of the coil and the proximal end of the coil is disposed within the lumen of the distal section of the catheter.
10. A vasoocclusive coil deployment system as defined in Claim 3 or Claim 7, wherein said proximal section of said catheter is formed of a polymer having a durometer in a range of about 62D to 75D.



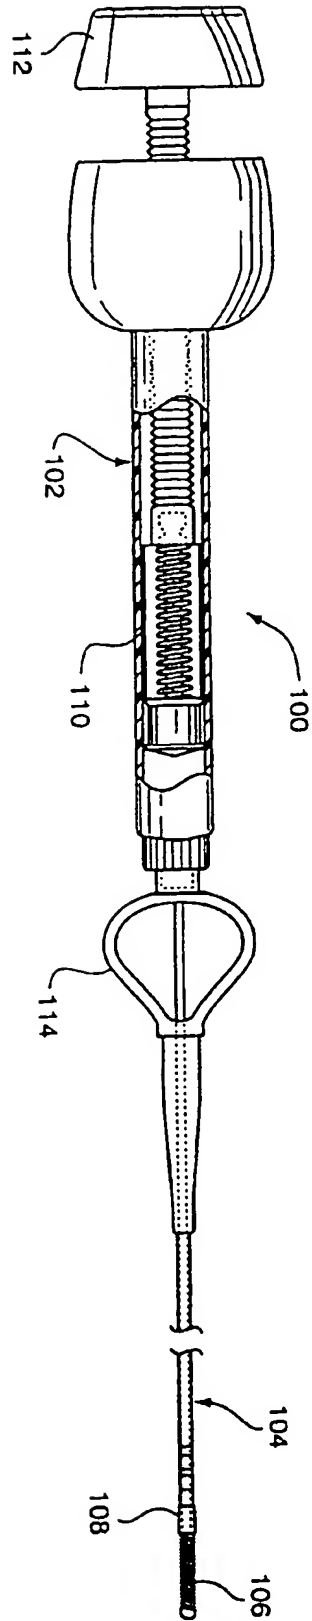


FIG. 1



**FIG. 2**

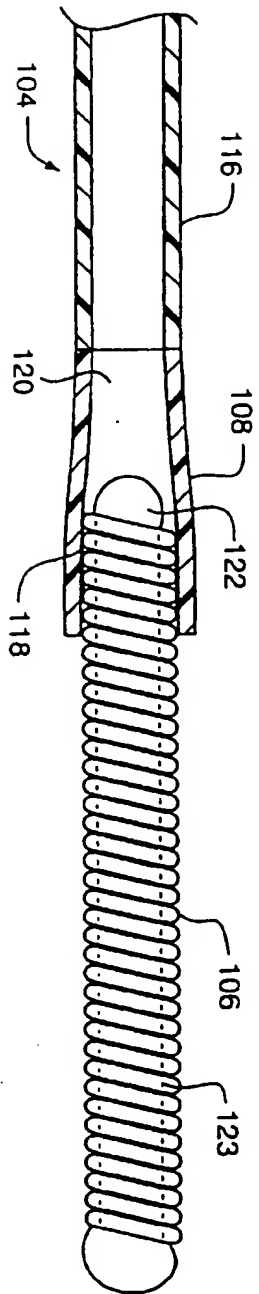

**FIG. 3**

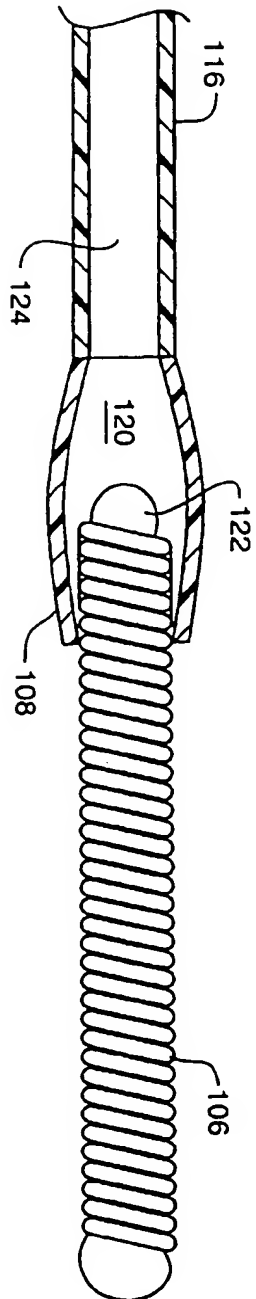

**FIG. 4**

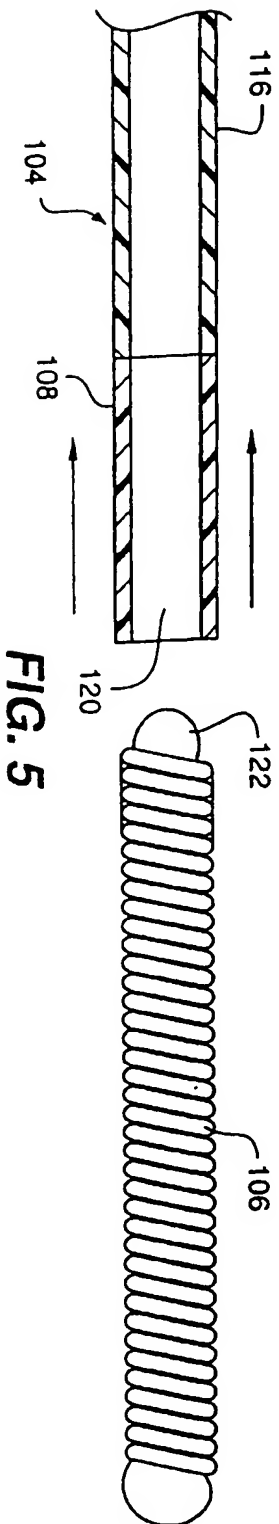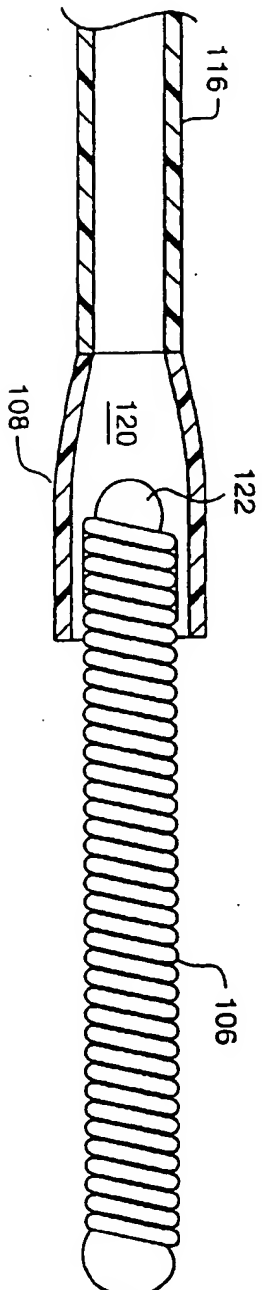

**FIG. 5**



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 99 30 1776

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
A	EP 0 717 969 A (TARGET THERAPEUTICS, INC.) 26 June 1996 * column 9, line 46 - column 10, line 5; figures 1,7,8 *	1,5	A61B17/12
A	WO 98 02100 A (ANSON MEDICAL LIMITED) 22 January 1998 * page 11, line 19 - page 13, line 18; figures 2-4,6,7 *	1,5	
A	US 5 690 667 A (GIA) 25 November 1997 * column 2, line 25-50; figures *	1,5	
A	US 5 167 624 A (BUTLER ET AL.) 1 December 1992 * column 4, line 1-38; figures *	1,5	
A,D	US 5 350 397 A (TARGET THERAPEUTICS, INC.) 27 September 1994 * page 3, line 53 - page 4, line 58; figure 1 *	1,5	
A	US 5 403 292 A (JU) 4 April 1995 * column 2, line 38-45; figures *	1,5	TECHNICAL FIELDS SEARCHED (Int.Cl.6)  A61B A61F A61M
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>10 June 1999</b>	Examiner <b>Giménez Burgos, R</b>
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03/92 (P4/C01)



**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 99 30 1776

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

10-06-1999

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0717969 A	26-06-1996	US 5814062 A	29-09-1998
		AU 4056095 A	27-06-1996
		CA 2165597 A	23-06-1996
		JP 8238320 A	17-09-1996
WO 9802100 A	22-01-1998	AU 3550897 A	09-02-1998
		EP 0915678 A	19-05-1999
US 5690667 A	25-11-1997	AU 689070 A	19-03-1998
		CA 2216618 A	26-03-1998
		EP 0832606 A	01-04-1998
		JP 10118082 A	12-05-1998
		NO 974436 A	27-03-1998
US 5167624 A	01-12-1992	NONE	
US 5350397 A	27-09-1994	AU 672938 B	17-10-1996
		AU 1498595 A	25-05-1995
		AU 667583 B	28-03-1996
		AU 5125893 A	12-04-1994
		CA 2123983 A,C	31-03-1994
		EP 0617633 A	05-10-1994
		EP 0914804 A	12-05-1999
		FI 942309 A	06-07-1994
		JP 2705851 B	28-01-1998
		JP 6510936 T	08-12-1994
		NO 941853 A	23-06-1994
		NZ 256523 A	24-04-1997
		WO 9406502 A	31-03-1994
		US 5891130 A	06-04-1999
US 5403292 A	04-04-1995	AU 688858 B	19-03-1998
		AU 1670695 A	05-12-1995
		EP 0759788 A	05-03-1997
		WO 9531226 A	23-11-1995
		JP 9506026 T	17-06-1997
		US 5599325 A	04-02-1997
		US 5725513 A	10-03-1998

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82